

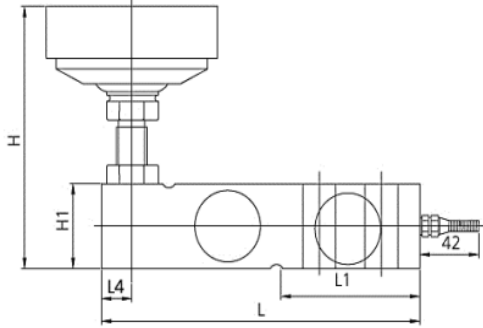


Ürün Kodu: WT-WSB



Ürün Açıklaması:

- Lama tipi yük hücresi
- C3 Sınıfı
- 0,5, 1,2,3,5,7,5,10 TON kapasite seçenekleri
- Nikel kaplamalı alaşımlı çelik, Paslanmaz çelik seçenekleri
- IP68 Koruma sınıfı
- Reaktör, bunker, silo ve tank tartım sistemleri, endüstriyel basküller, test cihazları ve diğer tartı sistemleri için uygundur.

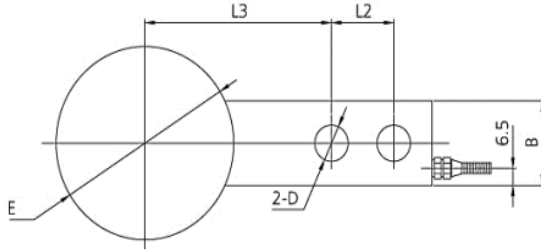

(t)	L	L1	L2	L3	L4	B	H	H1	H2	D	D1	D2	D3
0.5~2.5	130	53.5	25.4	76.2	12.7	31.8	78.8	31.8	12	φ13	φ38	φ12	φ16
3,5	171.5	72.5	38.1	95.3	19	38.1	94.1	38.1	10	φ20	φ50	φ16	φ20
7.5~10	225.5	102	50.8	124	25.3	50.8	130	50.8	107	φ27	φ64	φ20	φ32



CapaciW(R.L)		kgf	250,50,1000,2000,3000,5000,10000
Rated Output		mV/V	3.0 ± 0.0075
Zero Balance		mV/V	0.0 ± 0.03
Accuracy Class			C3
Non-Linearity		% R.O.	≤0.025
Hysteresis		% R.O.	≤0.025
Combined Error		% R.O.	≤0.025
Repeatability		% R.O.	≤0.01
Creep for 30min.		% R.O.	≤0.017
Return for 30min.		% R.O.	≤0.017
Resolution		-	≤1/4000
Division		mV/V	0.00075
Temperature	-Zero Value	0/0/100	≤0.014
	-Output Value	0/0/100	≤0.011
	-Recommended	V	10
Excitation	-Maximum	V	15
	-Input	Ω	350±3.5
Resistance	-Output	Ω	350±3.5
	-Insulation	MΩ	> 2000
Compensated Temperature Range		°C	-10 to +40
Operating Temperature Range		°C	-30 to +80
Material & Plate		-	Steel
Cable Specification		-	Ø5.4x4Px3M (PVC) Ø5.4x4Px5M (Urethane)
Safety Overload		% R.L.	150